

# PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner  
US Department of Commerce  
United States Patent and Trademark  
Office, PCT  
2011 South Clark Place Room  
CP2/5C24  
Arlington, VA 22202  
ETATS-UNIS D'AMERIQUE  
in its capacity as elected Office

|   |   |
|---|---|
| Date of mailing (day/month/year)<br>19 February 2001 (19.02.01)       |   |
| International application No.<br>PCT/FI00/00504                       | Applicant's or agent's file reference<br>2990374PC/nu     |
| International filing date (day/month/year)<br>06 June 2000 (06.06.00) | Priority date (day/month/year)<br>07 June 1999 (07.06.99) |
| Applicant<br>SOININEN, Jonne et al                                    |   |

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
03 January 2001 (03.01.01)

☐ in a notice effecting later election filed with the International Bureau on:  
\_\_\_\_\_

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

BEST AVAILABLE COPY

|   |   |
|---|---|
| The International Bureau of WIPO<br>34, chemin des Colombettes<br>1211 Geneva 20, Switzerland<br>Facsimile No.: (41-22) 740.14.35 | Authorized officer<br>R. E. Stoffel<br>Telephone No.: (41-22) 338.83.38 |
|---|---|

# PATENT COOPERATION TREATY

**PCT**

## NOTIFICATION OF THE RECORDING OF A CHANGE

(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

KOLSTER OY AB  
Iso Roobertinkatu 23  
P.O. Box 148  
FIN-00121 Helsinki  
FINLANDE

TECHNOLOGY CENTER 83100

FEB 15 2002

RECEIVED

|  |   |
|--|---|
| Date of mailing (day/month/year)<br>03 January 2002 (03.01.02) |   |
| Applicant's or agent's file reference<br>2990374PC/nu          | <b>IMPORTANT NOTIFICATION</b>   |
| International application No.<br>PCT/FI00/00504                | International filing date (day/month/year)<br>06 June 2000 (06.06.00) |

1. The following indications appeared on record concerning:

☒ the applicant      ☐ the inventor      ☐ the agent      ☐ the common representative

Name and Address

NOKIA NETWORKS OY  
Keilalahdentie 4  
FIN-02150 Espoo  
Finland

State of Nationality

FI

State of Residence

FI

Telephone No.

Facsimile No.

Teleprinter No.

RECEIVED

MAR 13 2002

Technology Center 2600

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person      ☒ the name      ☐ the address      ☐ the nationality      ☐ the residence

Name and Address

NOKIA CORPORATION  
Keilalahdentie 4  
FIN-02150 Espoo  
Finland

State of Nationality

FI

State of Residence

FI

Telephone No.

Facsimile No.

Teleprinter No.

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

☒ the receiving Office      ☐ the designated Offices concerned  
☐ the International Searching Authority      ☒ the elected Offices concerned  
☒ the International Preliminary Examining Authority      ☐ other:

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Athina NICKITAS-ETIENNE

Telephone No.: (41-22) 338.83.38

BEST AVAILABLE COPY

# PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 05 OCT 2001

WIPO

FCI

|   |  |  |
|---|--|--|
| Applicant's or agent's file reference<br>2990374PC/nu                                     | <b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/ISA/416) |  |
| International application No.<br>PCT/FI00/00504   | International filing date (day month year)<br>06.06.2000   | Priority date (day month year)<br>07.06.1999 |
| International Patent Classification (IPC) or national classification and IPC<br>H04Q 7/30 |  |  |
| Applicant<br>Nokia Networks OY et al  |  |  |

- This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
- This REPORT consists of a total of 4 sheets, including this cover sheet.  
  
☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).  
  
These annexes consist of a total of \_\_\_\_\_ sheets.

- This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

|  |   |
|--|---|
| Date of submission of the demand<br><br>03.01.2001   | Date of completion of this report<br><br>24.09.2001                       |
| Name and mailing address of the IPEA/SE<br>Patent- och registreringsverket<br>Box 5055<br>S-102 42 STOCKHOLM<br>Facsimile No. 08-667 72 88 | Authorized officer<br><br>Stefan Hansson/EÖ<br>Telephone No. 08-782 25 00 |

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI00/00504

## I. Basis of the report

### 1. With regard to the elements of the international application:\*

- ☒ the international application as originally filed
- ☐ the description:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the claims:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, as amended (together with any statement) under article 19  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the drawings:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_
- ☐ the sequence listing part of the description:  
 pages \_\_\_\_\_, as originally filed  
 pages \_\_\_\_\_, filed with the demand  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_

### 2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language \_\_\_\_\_ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

### 3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

### 4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages \_\_\_\_\_
- ☐ the claims, Nos. \_\_\_\_\_
- ☐ the drawings, sheet/fig \_\_\_\_\_

### 5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI00/00504

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

|                               |        |             |     |
|-------------------------------|--------|-------------|-----|
| Novelty (N)                   | Claims | <u>1-19</u> | YES |
|                               | Claims |             | NO  |
| Inventive step (IS)           | Claims | <u>1-19</u> | YES |
|                               | Claims |             | NO  |
| Industrial applicability (IA) | Claims | <u>1-19</u> | YES |
|                               | Claims |             | NO  |

**2. Citations and explanations (Rule 70.7)**The claimed invention

The claimed invention relates to a mechanism for the selection of a mobility agent for routing of higher protocol layer traffic, such as internet-type protocol traffic, in an access network. An access node (SGSN) checks during the attach procedure of a mobile station (MS) whether the mobile has macro mobility capability. If there is no mobility capability, a normal attach procedure is performed. However, if there is macro mobility capability, the access node selects suitable mobility entity (FA) to the mobile station.

The following documents have been cited in the International Search Report

D1: WO 9843446 A2

D2: US 5793762 A

D3: WO 9859468 A2

D1 describes a roaming mechanism enabling a mobile station to roam between a first data packet network utilising a mobile IP method and a second data packet network utilising a personal digital cellular mobility method. To handle this situation a foreign agent (FA) is integrated into a gateway packet switching centre (GPMSC) associated with the second packet data network (see fig. 6). When a mobile station associated with a home agent (HA) roams into a Personal Digital Cellular Mobility Method network (PDCMM or more commonly known as PMM network), the mobile station performs a registration in a conventional manner. The visited packet mobile switching centre (VPMSC) transmits a Packet Authentication request signal to the mobile station and establishes an IP tunnel with the newly FA (fig. 5, 6; page 13 line 8 - page 15 line 21).

.../...

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI00/00504

**Supplemental Box**

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V

However, D1 fails to disclose an access node, in connection with a network level attach procedure, that checks the macro mobility capability of the mobile station, selects a macro mobility entity for the mobile station and sends the identity of the selected macro mobility entity to the mobile station in association with an access context establishment.

D2 and D3 are considered to merely disclose the state of the art and are not commented on further.

Consequently, the claimed invention as in claims 1-19 is considered novel, to involve an inventive step and to have industrial applicability.

# RECORD COPY

1/4

## PCT REQUEST

2990374PC/nu

Original (for SUBMISSION) - printed on 06.06.2000 08:44:14 AM

|              |   |  |
|--------------|---|--|
| 0<br>0-1     | For receiving Office use only<br>International Application No.  | PCT/FI 0 0 / 0 0 5 0 4                                       |
| 0-2          | International Filing Date   | 0 6 JUN 2000 ( 0 6 -06- 2000 )                               |
| 0-3          | Name of receiving Office and "PCT International Application"  | The Finnish Patent Office<br>PCT International Application   |
| 0-4<br>0-4-1 | Form - PCT/RO/101 PCT Request<br>Prepared using   | PCT-EASY Version 2.90<br>(updated 10.05.2000)                |
| 0-5          | Petition<br>The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty |  |
| 0-6          | Receiving Office (specified by the applicant)   | National Board of Patents and Registration (Finland) (RO/FI) |
| 0-7          | Applicant's or agent's file reference   | 2990374PC/nu   |
| I            | Title of invention  | SELECTION OF MOBILITY AGENT IN ACCESS NETWORK                |
| II           | Applicant   |  |
| II-1         | This person is:   | applicant only   |
| II-2         | Applicant for   | all designated States except US                              |
| II-4         | Name  | NOKIA NETWORKS OY  |
| II-5         | Address:  | Keilalahdentie 4<br>FIN-02150 Espoo<br>Finland               |
| II-6         | State of nationality  | FI   |
| II-7         | State of residence  | FI   |
| III-1        | Applicant and/or inventor   |  |
| III-1-1      | This person is:   | applicant and inventor                                       |
| III-1-2      | Applicant for   | US only  |
| III-1-4      | Name (LAST, First)  | SOININEN, Jonne  |
| III-1-5      | Address:  | Urheilukatu 32<br>FIN-00250 Helsinki<br>Finland              |
| III-1-6      | State of nationality  | FI   |
| III-1-7      | State of residence  | FI   |

## PCT REQUEST

2990374PC/nu

Original (for SUBMISSION) - printed on 06.06.2000 08:44:14 AM

|         |  |  |
|---------|--|--|
| III-2   | <b>Applicant and/or inventor</b>   |  |
| III-2-1 | This person is:  | applicant and inventor   |
| III-2-2 | Applicant for  | US only  |
| III-2-4 | Name (LAST, First)   | MUHONEN, Ahti  |
| III-2-5 | Address:   | Holperintie 39<br>FIN-04680 Hirvivaara<br>Finland  |
| III-2-6 | State of nationality   | FI   |
| III-2-7 | State of residence   | FI   |
| IV-1    | <b>Agent or common representative; or address for correspondence</b>   |  |
|         | The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: | agent  |
| IV-1-1  | Name   | KOLSTER OY AB  |
| IV-1-2  | Address:   | Iso Roobertinkatu 23<br>P.O. Box 148<br>FIN-00121 Helsinki<br>Finland  |
| IV-1-3  | Telephone No.  | 358 9 618 821  |
| IV-1-4  | Facsimile No.  | 358 9 602 244  |
| IV-1-5  | e-mail   | kolster@kolster.fi   |
| V       | <b>Designation of States</b>   |  |
| V-1     | Regional Patent<br>(other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)        | AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZW<br>and any other State which is a Contracting State of the Harare Protocol and of the PCT<br>EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT<br>EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE and any other State which is a Contracting State of the European Patent Convention and of the PCT<br>OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT |



## PCT REQUEST

2990374PC/nu


Original (for SUBMISSION) - printed on 06.06.2000 08:44:14 AM

|        |  |  |                             |
|--------|--|--|-----------------------------|
| V-2    | National Patent<br>(other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)  | AE AG AL AM AT (patent and utility model) AU AZ BA BB BG BR BY CA CH&LI CN CR CU CZ (patent and utility model) DE (patent and utility model) DK (patent and utility model) DM DZ EE (patent and utility model) ES FI (patent and utility model) GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR (patent and utility model) KZ LC LK LR LS LT LU LV MA MD MG MK MN MW MX MZ NO NZ PL PT RO RU SD SE SG SI SK (patent and utility model) SL TJ TM TR TT TZ UA UG US UZ VN YU ZA ZW |                             |
| V-5    | Precautionary Designation Statement<br>In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. |  |                             |
| V-6    | Exclusion(s) from precautionary designations   | NONE   |                             |
| VI-1   | Priority claim of earlier national application   |  |                             |
| VI-1-1 | Filing date  | 07 June 1999 (07.06.1999)  |                             |
| VI-1-2 | Number   | 991297   |                             |
| VI-1-3 | Country  | FI   |                             |
| VI-2   | Priority document request<br>The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) identified above as item(s):   | VI-1   |                             |
| VII-1  | International Searching Authority Chosen   | Swedish Patent Office (ISA/SE)   |                             |
| VIII   | Check list   | number of sheets   | electronic file(s) attached |
| VIII-1 | Request  | 4  | -                           |
| VIII-2 | Description  | 13   | -                           |
| VIII-3 | Claims   | 3  | -                           |
| VIII-4 | Abstract   | 1  | 2990374p.txt                |
| VIII-5 | Drawings   | 2  | -                           |
| VIII-7 | TOTAL  | 23   |                             |

## PCT REQUEST

2990374PC/nu

Original (for SUBMISSION) - printed on 06.06.2000 08:44:14 AM

|         | Accompanying items   | paper document(s) attached   | electronic file(s) attached |
|---------|--|--|-----------------------------|
| VIII-8  | Fee calculation sheet                                      | ✓  | -                           |
| VIII-9  | Separate signed power of attorney                          | ✓  | -                           |
| VIII-10 | Copy of general power of attorney                          | ✓  | -                           |
| VIII-16 | PCT-EASY diskette  | -  | diskette                    |
| VIII-17 | Other (specified):   | Copy of Official Action  | -                           |
| VIII-18 | Figure of the drawings which should accompany the abstract | 2  |                             |
| VIII-19 | Language of filing of the international application        | English  |                             |
| IX-1    | Signature of applicant or agent                            |  Tapio Valkeiskangas |                             |
| IX-1-1  | Name   | KOLSTER OY AB  |                             |

## FOR RECEIVING OFFICE USE ONLY

|        |   |             |                  |
|--------|---|-------------|------------------|
| 10-1   | Date of actual receipt of the purported international application   | 06 JUN 2000 | ( 06 -06- 2000 ) |
| 10-2   | Drawings:   |             |                  |
| 10-2-1 | Received  |             |                  |
| 10-2-2 | Not received  |             |                  |
| 10-3   | Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application |             |                  |
| 10-4   | Date of timely receipt of the required corrections under PCT Article 11(2)  |             |                  |
| 10-5   | International Searching Authority   | ISA/SE      |                  |
| 10-6   | Transmittal of search copy delayed until search fee is paid   |             |                  |

## FOR INTERNATIONAL BUREAU USE ONLY

|      |  |  |
|------|--|--|
| 11-1 | Date of receipt of the record copy by the International Bureau |  |
|------|--|--|


(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number  
**WO 00/76234 A1**

- (51) International Patent Classification<sup>7</sup>: **H04Q 7/30**
- (21) International Application Number: **PCT/FI00/00504**
- (22) International Filing Date: **6 June 2000 (06.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
991297 **7 June 1999 (07.06.1999) FI**
- (71) Applicant (for all designated States except US): **NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SOININEN, Jonne [FI/FI]; Urheilukatu 32, FIN-00250 Helsinki (FI). MUHONEN, Ahti [FI/FI]; Holperintie 39, FIN-04680 Hirvivaara (FI).**
- (74) Agent: **KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:  
— With international search report.

[Continued on next page]

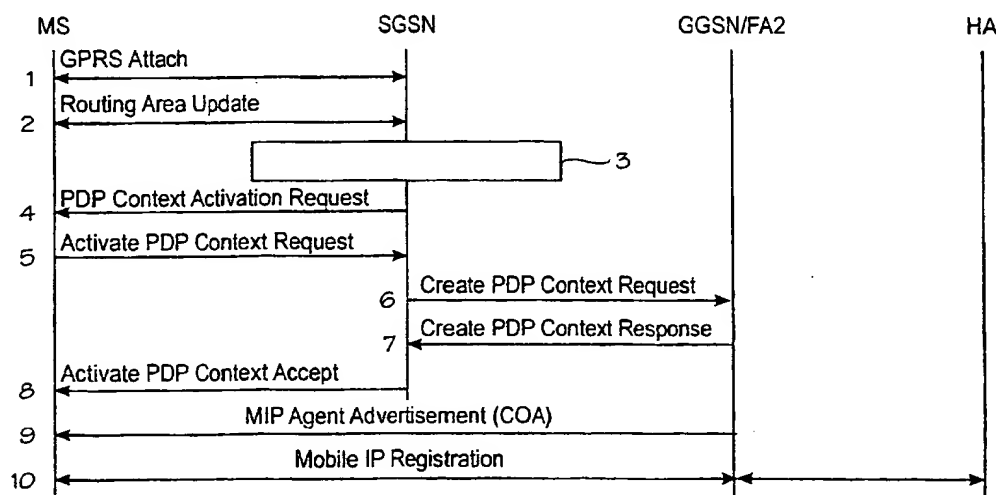(54) Title: **SELECTION OF MOBILITY AGENT IN ACCESS NETWORK**

(57) Abstract: In an access network which supports macro mobility management, an access node (SGSN) checks (3) during an attach procedure of a mobile station (MS) whether the mobile has macro mobility capability, i.e. whether there is a potential need for macro mobility services. Macro mobility entity (FA2) may be any entity which provides a point of attachment on the macro mobility level, such as a mobility agent in Mobile IP type mobility management. If there is no mobility capability, a normal attach procedure is performed. However, if there is macro mobility capability, the access node (SGSN) selects a suitable mobility entity (FA2) to the mobile station (MS), sends the identity of the selected mobility entity to the mobile station and requests (8) the mobile station to initiate an activation of a packet protocol (PDP) context in the system.

WO 00/76234 A1

WO 00/76234 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Selection of Mobility Agent in Access Network

### Field of the Invention

The invention relates to a mechanism for the selection of a mobility agent for routing of higher protocol layer traffic, such as an Internet-type protocol traffic, in an access network.

### Background of the Invention

Mobile communications system refers generally to any telecommunications system which enables a wireless communication when users are moving within the service area of the system. A typical mobile communications system is a Public Land Mobile Network (PLMN). Often the mobile communications network is an access network providing a user with a wireless access to external networks, hosts, or services offered by specific service providers.

The general packet radio service GPRS is a new service in the GSM system (Global System for Mobile Communication). A subnetwork comprises a number of packet data service nodes SN, which in this application will be referred to as serving GPRS support nodes SGSN. Each SGSN is connected to the GSM mobile communication network (typically to a base station controller BSC or a base station BTS in a base station system) so that the SGSN can provide a packet service for mobile data terminals via several base stations, i.e. cells. The intermediate mobile communication network provides radio access and packet-switched data transmission between the SGSN and mobile data terminals. Different subnetworks are in turn connected to an external data network, e.g. to a public switched data network PSPDN, via GPRS gateway support nodes GGSN. The GPRS service thus allows to provide packet data transmission between mobile data terminals and external data networks when the GSM network functions as a radio access network RAN.

Third generation mobile systems, such as Universal Mobile Communications system (UMTS) and Future Public Land Mobile Telecommunications system (FPLMTS), later renamed as IMT-2000 (International Mobile Telecommunication 2000), are being developed. In the UMTS architecture, a UMTS terrestrial radio access network, UTRAN, consists of a set of radio access networks RAN (also called radio network subsystem RNS) connected to the core network (CN). Each RAN is responsible for the resources of its set of cells. For each connection between a mobile station MS and the UTRAN, one RAN is a serving RAN. A RAN consists of a radio network controller RNC and

a multiplicity of base stations BTS. One core network which will be using the UMTS radio access network is the GPRS.

One of the main targets in the development of mobile communication networks is to provide an IP (Internet Protocol) service with a standard IP backbone which would use a combination of a Mobile IP and mobile network mobility management in the mobile networks. The basic IP concept does not support the mobility of the user: IP addresses are assigned to network interfaces in dependence on their physical location. In fact, the first field of an IP address (the NETID) is common to all interfaces that are linked to the same Internet subnet. This scheme prevents the user (the mobile host) from keeping its address while moving over different Internet subnets, i.e. while changing the physical interface.

In order to enhance mobility in the Internet, a Mobile IP protocol for IP version 4 has been introduced by the Internet Engineering Task Force (IETF) in the standard RFC2002. A Mobile IP enables the routing of IP datagrams to mobile hosts, independently of the point of attachment in the sub-network. The Mobile IP protocol introduces following new functional or architectural entities.

'Mobile Node MN' (also called Mobile Host MH) refers to a host that changes its point of attachment from one network or subnetwork to another. A mobile node may change its location without changing its IP address; it may continue to communicate with other Internet nodes at any location using its (constant) IP address. 'Mobile Station (MS)' is a mobile node having a radio interface to the network. 'Tunnel' is the path followed by a datagram when it is encapsulated. The encapsulated datagram is routed to a known decapsulation agent, which decapsulates the datagram and then correctly delivers it to its ultimate destination. Each mobile node is connected to a home agent over a unique tunnel, identified by a tunnel identifier which is unique to a given Foreign Agent/Home Agent pair.

'Home Network' is the IP network to which a user logically belongs. Physically, it can be e.g. a local area network (LAN) connected via a router to the Internet. 'Home Address' is an address that is assigned to a mobile node for an extended period of time. It may remain unchanged regardless of where the MN is attached to the Internet. Alternatively, it could be assigned from a pool of addresses.

'Mobility Agent' is either a home agent or a foreign agent. 'Home Agent HA' is a routing entity on a mobile node's home network which tunnels packets for delivery to the mobile node when it is away from home, and maintains current location information for the mobile node. It tunnels datagrams for delivery to a mobile node, and, optionally, detunnels datagrams from it, when the mobile node is away from home. 'Foreign Agent FA' refers to a routing entity in a mobile node's visited network which provides routing services to the mobile node while registered, thus allowing a mobile node to utilise its home network address. The foreign agent detunnels and delivers packets to the mobile node that were tunnelled by the mobile node's home agent. For datagrams sent by a mobile node, the foreign agent may serve as a default router for registered mobile nodes.

RFC2002 defines 'Care-of Address' (COA) as the termination point of a tunnel toward a mobile node, for datagrams forwarded to the mobile node while it is away from home. The protocol can use two different types of care-of addresses: a "foreign agent care-of address" is an address announced by a foreign agent with which the mobile node is registered, and a "co-located care-of address" is an externally obtained local address which the mobile node has acquired in the network. An MN may have several COAs at the same time. An MN's COA is registered with its HA. The list of COAs is updated when the mobile node receives advertisements from foreign agents. If an advertisement expires, its entry or entries should be deleted from the list. One foreign agent can provide more than one COA in its advertisements. 'Mobility Binding' is the association of a home address with a care-of address, along with the remaining lifetime of that association. An MN registers its COA with its HA by sending a Registration Request. The HA replies with a Registration Reply and retains a binding for the MN.

A single generic mobility handling mechanism that allows roaming between all types of access networks would allow the user to conveniently move between fixed and mobile networks, between public and private networks as well as between PLMN's with different access technologies. Therefore, mechanisms supporting the Mobile IP functionality are being developed also in mobile communication systems, such as UMTS and GPRS.

It is desired that the Mobile IP will be implemented as an overlay of the UMTS/GPRS network while maintaining backwards compatibility with present systems, assuming minimal modifications in the GPRS standards and on

networks whose operators do not want to support the MIP. Fig. 1 illustrates the minimum configuration for a GPRS operator who wishes to offer the mobile IP service. The current GPRS structure is kept and it handles the mobility within the PLMN, while MIP allows the user to roam between other systems, such as LAN's, and the UMTS without losing an ongoing session. In Fig. 1 the foreign agents FA are located at GGSN's. All GGSN's may not have FA's. The SGSN and the GGSN may also be co-located. One FA in a PLMN is sufficient for offering MIP service, but for capacity and efficiency reasons, more than one FA may be desired. This means that the MS must request a PDP context to be set up with a GGSN that offers FA functionality. While setting up the PDP context, the MS is informed about network parameters of the FA, e.g. the care-of address.

The problem is to know whether the SGSN has an associated GGSN with Foreign Agent (FA) capabilities and to open a PDP address to the correct one of several FAs, such as the nearest one.

Similar problems may be encountered in any mobility management and routing on a system level overlaying the mobility management of an access network. These various overlaying mobility managements are commonly referred to as macro mobility management herein.

20

### **Summary of the Invention**

An object of the present invention is to overcome or alleviate the above described problems.

The object is achieved with a method, a system and an access node characterized by what is disclosed in the attached independent claims. Preferred embodiments of the invention are disclosed in the attached dependent claims.

In the present invention a support node, or more generally any access node, checks preferably during an attach procedure of a mobile station whether the mobile concerned has macro mobility capability, i.e. whether a potential need for a mobility entity or a macro mobility capability can be assumed. Mobility entity may be any entity which provides a point of attachment on the macro mobility level, such as a mobility agent in the mobile IP type mobility management. If there is no mobility capability, a normal attach procedure is performed. However, if there is a macro mobility capability, the access node selects a suitable mobility entity to the mobile station and sends the identity of



the selected mobility entity to the mobile station in association with an access context establishment. The access context establishment may be, for example, the creation of a packet protocol (PDP) context, and the access node may request the mobile station to initiate an activation of a packet protocol (PDP) context in the system. The mobility entity identity is preferably sent in the PDP context activation request so that no extra message is required. Also other mobility entity attributes may be sent to the mobile station. If the mobile station really is interested in using the macro mobility, it performs a PDP context activation immediately so that a connection is set up to the selected mobility entity.

In the preferred embodiment of the invention the macro mobility management is Mobile IP type mobility management. A typical feature of the mobility agent in the Mobile IP is that it periodically transmits agent advertisement messages to the mobile nodes in order to advertise its services. The mobile nodes use these advertisements to determine the current point of attachment to the Internet. The connection established to the selected mobility agent allows the agent advertisement messages sent by the selected mobility agent to be received by the mobile node, and thereby the mobile node is able to initiate a standard mobile IP registration.

In an embodiment of the invention, when the mobile station is not interested in using the macro mobility, e.g. because it has no associated mobile node (e.g application or device using mobile IP) at the moment, it may ignore the PDP activation request. The mobile station may further store the received mobility entity information to be used later. When the mobile station at a later stage wishes to make the registration according to the specific macro mobility management, it can use the stored information.

The selection of the mobility entity may be based on any suitable criterion. For example, a mobility entity associated with the nearest gateway node may be selected in order to optimize the routing of the macro layer traffic. Another criterion may be a current loading of the mobility entities so that mobility entity with a light traffic load is preferred to heavily loaded mobility agents in order to distribute the traffic in the network. Selection may be based on mobility entity data stored in the access node, or on information or an overriding command received from another network element, or on a combination of these.

The checking of the macro mobility capability may be based on subscriber data stored in a subscriber data base or on information provided by said mobile station in said attach procedure. For example, the mobile station may indicate the Mobile IP capability in the attach request, e.g. by means of a Mobile Station Classmark. As a further example, the Mobile IP capability may be checked by interrogating a home subscriber data base. Generally, the checking includes all measures which indicate the Mobile IP capability of the mobile station to the access node.

One of the benefits of the invention is that the mobile station does not need to know the mobility agents beforehand but it is informed of a suitable one when accessing the network. A further advantage of the invention is that the new inventive functionality at the access node enables to detect the need for a mobility entity, to select the most optimal mobility entity in each part of the network and to change it, without any non-standard signalling or procedure being needed in other elements of the packet radio network or on the Mobile IP level. The optimal selection of the mobility entity may further result in more optimal routing which allows transmission mobility entity resources to be saved or used more effectively in the packet radio system, and possibly also to make the connection faster as the connection leg between the access node and the mobility entity is shorter.

### **Brief Description of the Drawings**

In the following, the invention will be described in greater detail by means of preferred embodiments with reference to the accompanying drawings, in which

Figure 1 illustrates GPRS network architecture,

Figure 2 is a signalling diagram illustrating the method according to the invention, and

Figure 3 is a flow diagram illustrating the function of a support node.

### **Preferred Embodiments of the Invention**

The present invention can be applied to any packet mode communications requiring a macro mobility management which overlays the mobility management of an access network. The invention is especially well suited for supporting a Mobile IP type mobility management in an access network. The access network may be any access network, such as a radio access network.

The invention can be particularly preferably used for providing a general packet radio service GPRS in the pan-European digital mobile communication system GSM (Global System for Mobile Communication) or in corresponding mobile communication systems, such as DCS1800 and PCS (Personal Communication System), or in third generation (3G) mobile systems, such as UMTS, implementing a GPRS-type packet radio. In the following, the preferred embodiments of the invention will be described with reference to a GPRS packet radio network formed by the GPRS service and the 3G or GSM system, without limiting the invention to this particular packet access system.

A GPRS architecture utilizing 3G radio access (such as UMTS) or 2G radio access (such as GSM) is illustrated in Fig. 1. The GPRS infrastructure comprises support nodes such as a GPRS gateway support node (GGSN) and a GPRS serving support node (SGSN). The main functions of the GGSN nodes involve interaction with an external data network. The GGSN updates a location directory using routing information supplied by the SGSNs about an MS's path and routes the encapsulated external data network protocol packet over the GPRS backbone to the SGSN currently serving the MS. It also decapsulates and forwards external data network packets to the appropriate data networks and handles the billing of data traffic.

The main functions of the SGSN are to detect new GPRS mobile stations in its service area, to handle the process of registering the new MSs along with the GPRS registers, to send/receive data packets to/from the GPRS MS, and to keep a record of the location of the MSs within its service area. The subscription information is stored in a GPRS register (HLR) where the mapping between a mobile's identity (such as MS-ISDN or IMSI) and the PSPDN address is stored. The GPRS register serves as a database from which the SGSNs can ask whether a new MS in its area is allowed to join the GPRS network.

The GPRS gateway support nodes GGSN connect an operator's GPRS network to external systems, such as other operators' GPRS systems, to data networks 11, such as an IP network (Internet) or an X.25 network, and to service centres. Fixed hosts 14 can be connected to the data network 11 e.g. through a local area network LAN and a router 15. A border gateway BG provides access to an inter-operator GPRS backbone network 12. The GGSN may also be connected directly to a private corporate network or a host. The GGSN includes GPRS subscribers' PDP addresses and routing information,

i.e. SGSN addresses. Routing information is used for tunnelling protocol data units PDU from the data network 11 to the current switching point of the MS, i.e. to the serving SGSN. The functionalities of the SGSN and GGSN can be connected to the same physical node (SGSN+GGSN).

5           The home location register HLR of the GSM network contains GPRS subscriber data and routing information, and it maps the subscriber's IMSI into one or more pairs of the PDP type and PDP address. The HLR also maps each PDP type and PDP address pair into a GGSN node. The SGSN has a Gr interface to the HLR (a direct signalling connection or via an internal  
10 backbone network 13). The HLR of a roaming MS and its serving SGSN may be in different mobile communication networks.

          The intra-operator backbone network 13, which interconnects an operator's SGSN and GGSN equipment can be implemented, for example, by means of a local network, such as an IP network. It should be noted that an  
15 operator's GPRS network can also be implemented without the intra-operator backbone network, e.g. by providing all features in one computer.

          Network access provides the means for connecting a user to a telecommunication network in order to use the services and/or facilities of that network. An access protocol is a defined set of procedures that enables the  
20 user to employ the services and/or facilities of the network. The SGSN, which is at the same hierarchical level as the mobile switching centre MSC, keeps track of the individual MSs' locations and performs security functions and access control. GPRS security functionality is equivalent to the existing GSM security. The SGSN performs authentication and cipher setting procedures  
25 based on the same algorithms, keys, and criteria as in the existing GSM. The GPRS uses a ciphering algorithm optimised for packet data transmission.

          In order to access the GPRS services, an MS shall first make its presence known to the network by performing a GPRS attach. This operation establishes a logical link between the MS and the SGSN, and makes the MS  
30 available for the SMS over the GPRS, for paging via the SGSN, and for notification of incoming GPRS data. More particularly, when the MS attaches to the GPRS network, i.e. in a GPRS attach procedure, the SGSN creates a mobility management context (MM context), and a logical link LLC (Logical Link Control) is established between the MS and the SGSN in a protocol layer. MM  
35 contexts are stored in the SGSN and MS. The MM context of the SGSN may

contain subscriber data, such as the subscriber's IMSI, TLLI and location and routing information, etc.

In order to send and receive GPRS data, the MS shall activate the packet data address that it wants to use by requesting a PDP activation procedure. This operation makes the MS known in the corresponding GGSN, and interworking with external data networks can commence. More particularly, one or more PDP contexts are created in the MS, the GGSN and the SGSN, and stored in the serving SGSN in connection with the MM context. The PDP context defines different data transmission parameters, such as the PDP type (e.g. X.25 or IP), PDP address (e.g. IP address), quality of service QoS and NSAPI (Network Service Access Point Identifier). The MS activates the PDU context with a specific message, Activate PDP Context Request, in which it gives information on the TLLI, PDP type, PDP address, the required QoS and NSAPI, and optionally the access point name APN. The SGSN sends a Create PDP Context message to the GGSN which creates the PDP context and sends it to the SGSN. The SGSN sends the PDP context to MS in an Activate PDP Context Response message, and a virtual connection or link between the MS and the GGSN is established. As a result, the SGSN forwards all the data packets from the MS to the GGSN, and the GGSN forwards to the SGSN all data packets received from the external network and addressed to the MS. The PDP context is stored in the MS, the SGSN and the GGSN. When the MS roams to the area of a new SGSN, the new SGSN requests MM and PDP contexts from the old SGSN.

Fig. 1 illustrates the implementation of a Mobile IP in the GPRS/3G environment.

The MS can be a laptop computer PC connected to a cellular telephone enabling packet radio transmission. Alternatively, the MS can be an integrated combination of a small computer and a packet radio telephone, similar in appearance to the Nokia Communicator 9000 series. Yet further embodiments of the MS include various pagers, remote-control, surveillance and/or data-acquisition devices, etc. The user of a mobile station MS subscribes to a special Mobile IP service. The subscription information is stored in the Home Location Register HLR together with the user's home IP address.

In Fig. 1 the foreign agents FA are located at (integrated into) GGSN's. An alternative is that the SGSN and the GGSN are co-located, and the FAs are located at SGSN+GGSNs. It should be noted that there may be

more than one SGSN and GGSN in one network. All GGSNs may not have FAs. Each FA has an IP address in the Internet and in the operator's own private GPRS/3G backbone network. More precisely, the FA's IP address is such that IP packets destined to that address are routed in the Internet to the GGSN associated with the FA. When the MN leaves its home subnet and registers to a new FA, it can no longer be reached on the basis of its home IP address alone, but must be assigned an address belonging to the visited network, called the *care-of address (COA)*. The care-of address positively identifies the instantaneous location of the mobile terminal and may be: 1) the IP address of the FA belonging to the visited network, or 2) an IP address acquired directly by the mobile terminal through an autoconfiguration mechanism from the local IP address space, in which case the term co-located care-of address is used. Upon registering to a new FA and obtaining a COA, the MN then registers with a home agent HA in its home network and informs the latter of its COA. In Fig. 1 a home agent HA is located in the data network 11 which is the home network of the mobile node MN associated with the mobile station MS. A second host 14 wishing to communicate with the MN need not know that the MN has moved: it simply sends IP packets addressed to the MN's home IP address. These packets are routed via normal IP routing to the MN's home network, there they are intercepted by the HA. The HA encapsulates each such packet into another IP packet which contains the MN's COA as these packets are thus delivered to the FA (a process called tunneling). The FA forwards the IP packet to the GGSN. The GGSN forwards the IP packet (which may be encapsulated for transmission over the GPRS backbone) to the serving SGSN which further forwards the IP packet to the MS/MN. Packets from the MN to the second host 14 need not necessarily be tunneled: the MN may simply send them to the GGSN which directly forwards the packets to the second host 14, without interception by the FA or the HA.

As noted above, according to the present invention the SGSN selects the mobility agent and indicates it to the mobile station during the GPRS attach. A preferred embodiment of the invention will be now described with reference to Figures 1, 2, 3 and 4.

A reference is now made to Figure 1. The home network of the mobile station MS is the GPRS/3G network 1. The user of the mobile station MS subscribes to a special Mobile IP service, and an IP application in the MS or in a separate data terminal is a mobile node MN in the Mobile IP communication.

Let us now assume that the MS/MN is located in the service area of another GPRS/3G network 2 which is served by a support node SGSN2. The MS part listens to radio broadcast messages, which contain information about radio parameters, network and cell identity, etc. as well as e.g. information about available core network, service providers, service capabilities etc. Then the MS sends a GPRS attach request to the SGSN2, as shown in step 1 in Fig. 2. The SGSN2 creates a mobility management context (MM context), and a logical link LLC (Logical Link Control) is established between the MS and the SGSN in a protocol layer. MM contexts are stored in the SGSN and MS. The MM context of the SGSN may contain subscriber data, such as the subscriber's IMSI, TLLI and location and routing information, etc. The authentication, ciphering and location updating procedures, as well as an interrogation to the HLR of the MS/MN in order to obtain the subscriber data, may typically be involved with the creation of the MM context, as shown in steps 2. In the preferred embodiments the procedures involved in steps 1 and 2 are in accordance with the basic GPRS attach defined in the current GPRS/UMTS specifications.

During the GPRS attach procedure, preferably after the MM context is created, the SGSN2 executes the Mobile IP capability check and the FA selection procedure according to the present invention, step 3.

The check and selection procedure according to the preferred embodiment of the present invention is illustrated in Figure 3.

In step 31 the SGSN2 checks whether the MS/MM has a Mobile IP capability. For example, the SGSN2 may check whether the subscriber data obtained from the HLR indicates that the mobile station MS subscribes to a special Mobile IP service. Alternatively or in addition, the SGSN2 may check whether the Mobile Station Classmark Information element received in the attached request message from the MS indicates that the MS has the Mobile IP capability. The Mobile Station Classmark Information element is used to indicate the general characteristics of the mobile station equipment to the network in order to affect the manner in which the network handles the operation of the mobile station. If the Mobile IP capability is indicated in the classmark, this can be utilized in the present invention. However, it should be noted that the recognition of the Mobile IP capability can be based on any information received from the MS, another network element (such as HLR) or stored locally in the SGSN2.

If the Mobile IP capability of the MS is found in step 31, the SGSN2 selects a suitable foreign agent (FA) for the MS, step 32. The selection of the mobile agent may be based on any suitable criterion. For example, the address of the FA associated with the nearest GGSN, i.e. a FA2 at the GGSN2, may be stored in SGSN2 for selection purposes. In that case, the SGSN2 may always select the FA2. Normally this approach also provides the most optimal routing, i.e. minimizes the length of the routing path through the network. In another embodiment of the invention, the selection is based on the traffic load at the foreign agents FA1 and FA2. The traffic load may be monitored by the operation and maintenance center AMC of the network (not shown) and informed to the SGSN2. The SGSN2 may select the FA2, if the traffic load at the FA2 is below a predetermined threshold, and select another FA having a lower traffic load, if the traffic load at the FA2 exceeds the threshold. Also other criteria are apparent to a person skilled in the art, depending on the system parameters which are to be considered in the selection. It is also possible that another network element, such as the OMC, commands the SGSN to select a specific FA, for example based on the above mentioned criteria.

After selecting the FA, the SGSN2 sends to the MS a Request PDP Context Activation message which requests the MS to initiate activation of a PDP context. In the preferred embodiment of the invention, the request message includes the IP address of the FA and information that the address is a FA address. The FA information may be included in the Request PDP Context Activation message by using the offered PDP address information field. In the offered PDP context address information field, as currently defined, there are spare bits that could carry the information that the PDP address in the field is a FA address. However, it should be noted that any other information field, an additional information field, another message, or a dedicated message may be employed for carrying the FA information according to the present invention. Another example of existing messages that could be used for this purpose is the GPRS attach acknowledgement. It should also be noted that the exact point during the GPRS attach procedure when the IP capability check and the FA selection is carried out may differ from the point shown in Figure 2, without departing from the basic principles of the invention.

If no mobile IP capability is found in step 31, the SGSN2 completes the GPRS attach procedure as defined in the current GPRS/UMTS specifications (step 34).



Referring again to Figure 2, the SGSN sends the Request PDP Context Activation message as described above (step 4). If the MS is really ready to use the Mobile IP (e.g. the MS has a laptop computer with the Mobile IP application software connected), the MS immediately sends to the SGSN2 the Activate PDP Context Request message containing the FA address in the requested PDP address field. The SGSN2 creates a PDP context in the GGSN/FA2 by sending a Create PDP Context request to the GGSN/FA2 (step 6 in Figure 2). The GGSN/FA2 creates the PDP context for the MS/MN and returns a Create PDP Context response to the SGSN2 (step 7 in Figure 2). The SGSN2 establishes the PDP Context for the MS/MN, and responds to the MS/MN with the Activate PDP Context Accept message (step 8 in Figure 2). Thus, a virtual connection has been established between the MS/MN and the GGSN/FA2.

All the previous procedures have been executed in the GPRS/3G layer only. The overlaying Mobile IP layer, and thereby the MS part of the MS/MN, need not be aware of the selection of the FA according to the present invention. However, due to the connection established to the GGSN/FA2, the MN is now able to receive the agent advertisement messages broadcasted by the FA2 in accordance with the Mobile IP protocol. The agent advertisement message may also include the care-of-address COA, or the MN may obtain the COA in accordance with the MIP standard. The mobile node MN then registers its COA with its home agent HA in accordance with the MIP standard (step 10 in Figure 2). Depending on its method of attachment, the MS will register either directly with its HA, or through the FA2 which forwards the registration to the HA. Thereafter, the Mobile IP tunneling between the HA and the GGSN/FA2 is established, in accordance with the Mobile IP standard.

As a result, the selection of the correct FA and the foreign agent advertisement can be established using standard GPRS/3G procedures and messages as standard Mobile IP procedures and messages everywhere else but in the SGSN2, and possibly in the MS. Also in the SGSN2 only minor modifications are needed.

The description only illustrates preferred embodiments of the invention. The invention is not, however, limited to these examples, but it may vary within the scope and spirit of the appended claims.

## Claims

1. A method of indicating a macro mobility entity in an access system comprising a plurality of mobile stations (MS), access nodes (SGN1, SGN2), and at least one mobility entity (FA1) arranged to provide macro mobility management services to the mobile stations (MS/MN) while registered to the access system, said method comprising the steps of  
initiating an attach procedure to one of said access nodes by a mobile station,  
characterized by further steps of  
10 reacting to said mobile station having IP capability by  
initiating at said access node a selection of a macro mobility entity for said mobile station, and  
sending the identity of said selected macro mobility entity to said mobile station in association with an access context establishment.  
15
2. A method according to claim 1, characterized by the step of sending to said mobile station a request to initiate activation of a packet protocol context for said mobile station in said access system.
3. A method according to claim 1 or 2, characterized by the  
20 step of checking at said access node, in response to said initiation of the attach procedure, whether said mobile station has macro mobility capability.
4. A method according to claim 1, 2 or 3, characterized by the step of sending the identity of said selected mobility entity to said mobile station in said request.
- 25 5. A method according to claim 1, 2, 3 or 4, characterized by the step of  
initiating an activation of the packet protocol context by said mobile station having an associated mobile node in order set up a connection to said selected mobility entity, if a registration according to the macro mobility management is desired.  
30
6. A method according to any one of claims 1-5, characterized by said macro mobility management being Mobile IP type mobility management, and by the step of sending an agent advertisement message from said selected mobility agent to said mobile node over said connection,  
35 said agent advertisement message enabling said mobile node to initiate Mobile IP registration.

7. A method according to any one of claims 1-6, characterized by the step of

checking said macro mobility capability of said mobile station on the basis of subscriber data stored in a subscriber data base or information provided by said mobile station in said attach procedure.

8. A method according to claim 7, characterized by said macro mobility capability being indicated by a classmark information of said mobile station.

9. A method according to any one of claims 1-8, characterized in that said selected mobility entity is a foreign agent associated with one of said gateway nodes in said packet access network.

10. A method according any one of claims 1-9, characterized in that said identity includes a mobile entity address (FA1, FA2).

11. A method according any one of claims 1-10, characterized in that the access system is a radio system, such as GPRS or UMTS.

12. A packet access system, comprising  
a plurality of mobile stations (MS), at least some of said mobile stations supporting macro layer mobility, such as a Mobile IP,  
access nodes,  
at least one mobility entity (FA1) arranged to provide macro mobility management services,  
characterized by  
said access nodes being responsive to said mobile station (MS/MN) having the macro mobility capability to  
initiate a selection of a macro mobility entity (FA1,FA2) for said mobile station (MS/MN), and to  
send an identity of said selected macro mobility entity (FA1,FA2) to said mobile station (MS/MN) .

13. A system according to claim 12, characterized by said access nodes being responsive to said mobile station (MS/MN) having the macro mobility capability to initiate activation of a packet protocol context for said mobile station in said access system.

14. A system according to claim 12 or 13, characterized by said access nodes being responsive to an attach request received from a mobile station to check whether the mobile station has macro mobility capability.

15. A system according to claim 12, 13 or 14, characterized by said access node sending the identity of said selected mobility entity (FA1,FA2) to said mobile station in said request.

5 16. A system according to any one of claims 12-15, characterized by said mobile station, when having an associated mobile node and desiring a macro mobility registration, being arranged to initiate activation of the packet protocol context in order set up a connection to said selected mobility entity (FA1,FA2) according to said identity.

10 17. A system according to any one of claims 12-16, characterized by said access nodes being arranged to check said macro mobility capability of said mobile station (MS/MN) on the basis of subscriber data stored in a subscriber data base or information provided by said mobile station in said attach procedure.

15 18. An access node for a packet access system comprising a plurality of mobile stations (MS), at least some of said mobile stations (MS/MN) supporting macro mobility, access nodes (SGSN1, SGSN2) serving said mobile stations within respective parts (RAN1, RAN2) of the packet access system, and at least two macro mobility entities (FA1, FA2) being arranged to provide macro mobility management services to the mobile stations (MS/MN) while registered to the access system, characterized by said access  
20 node comprising

means, responsive to said mobile station (MS/MN) having the macro mobility capability, for


25 selecting at said access node a macro mobility entity (FA1,FA2) for said mobile station (MS/MN), and for

sending an identity of said selected macro mobility entity (FA1,FA2) to said mobile station (MS/MN) in association with an access context establishment.

30 19. An access node according to claim 18, characterized by means for checking whether a mobile station (MS/MN) accessing the system via said access node (SGSN2) has macro mobility capability.

1/2

Fig. 1

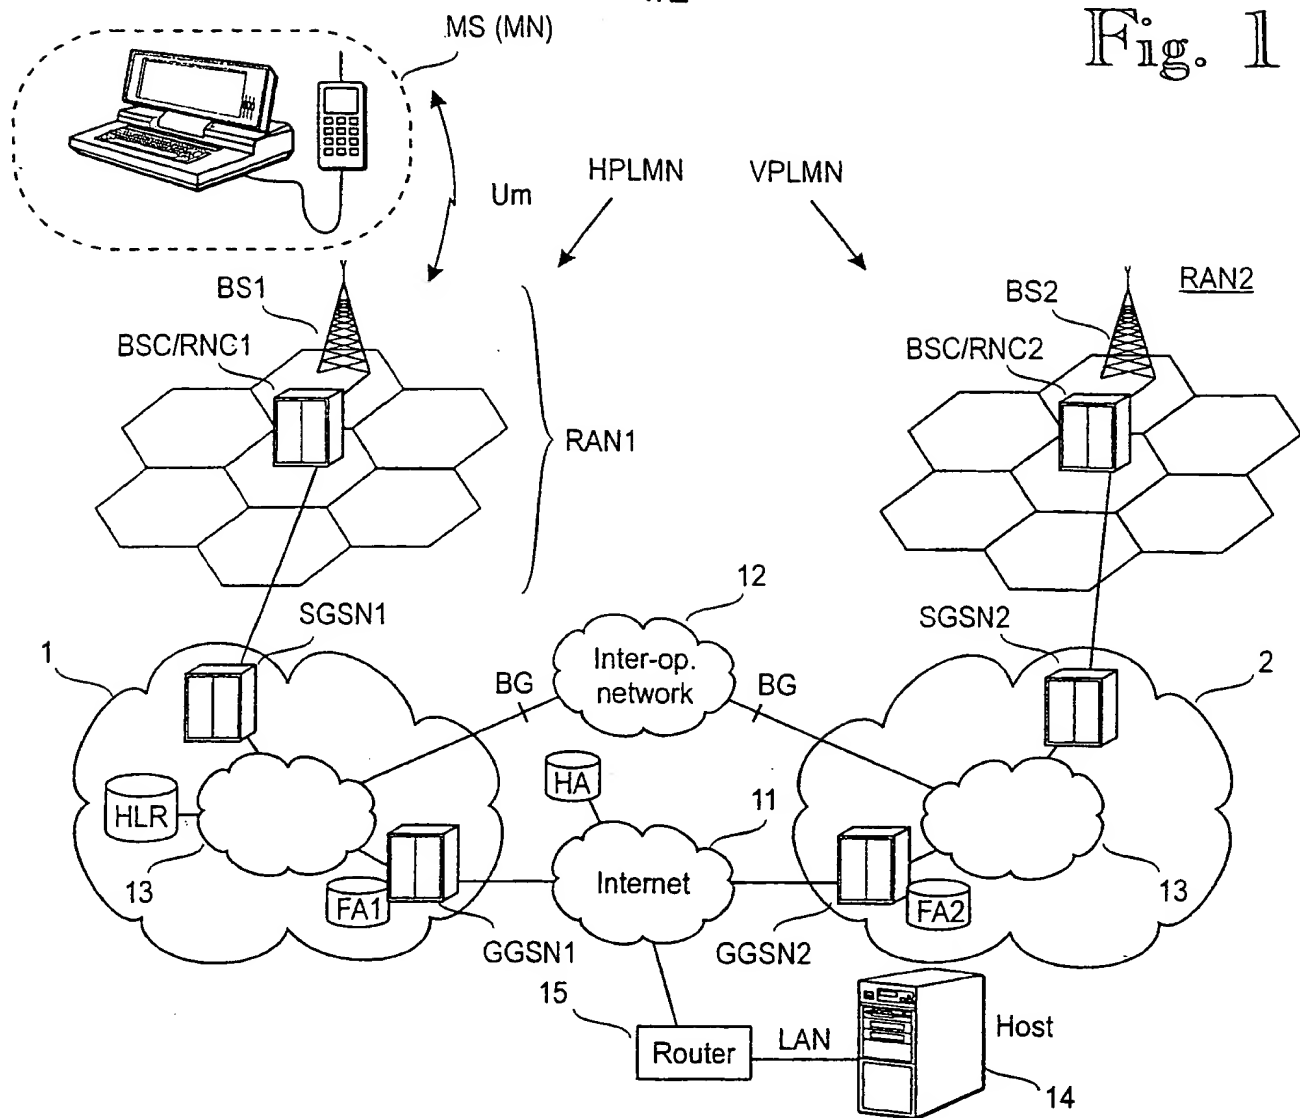

2/2

Fig. 2


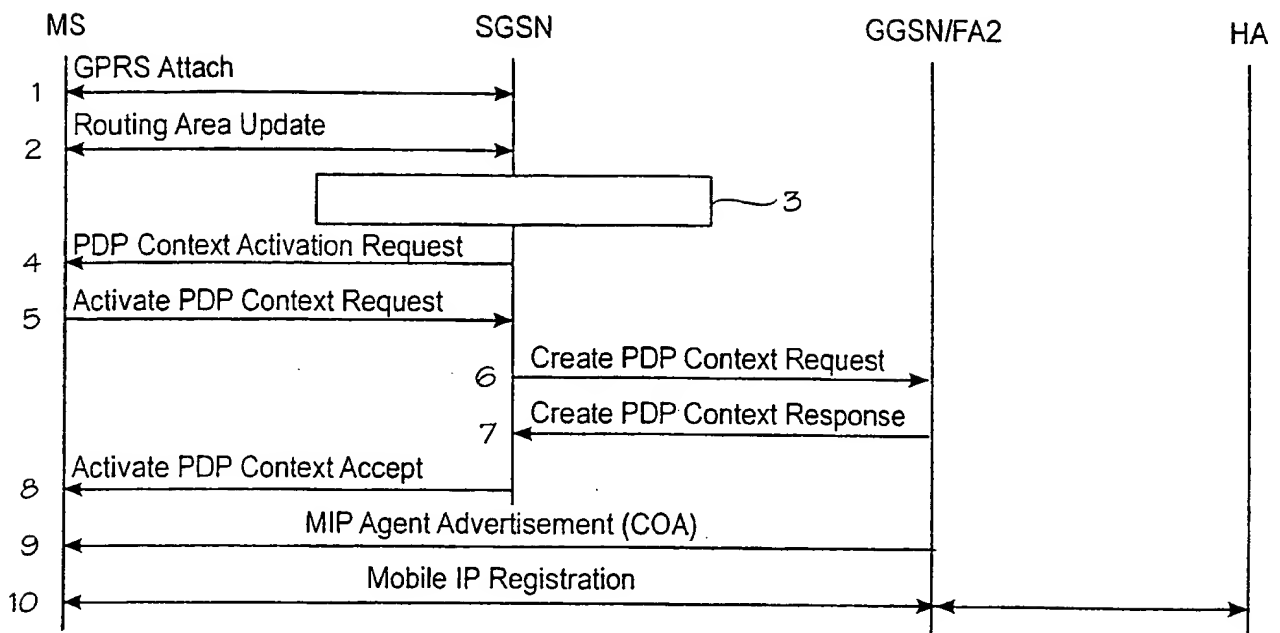


Fig. 3

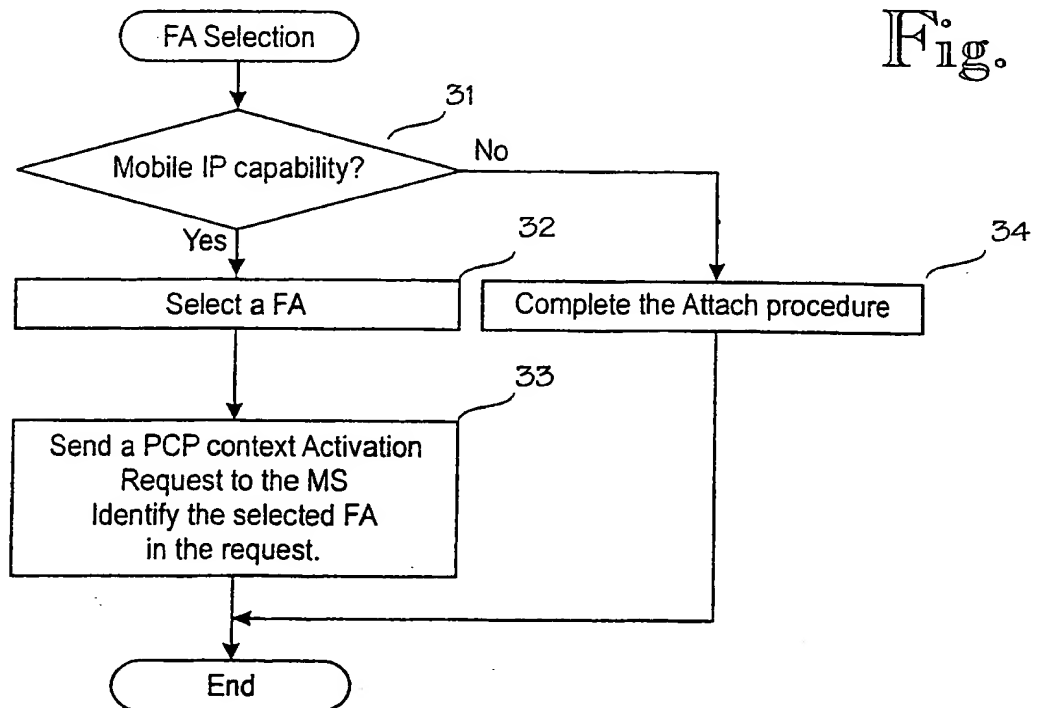

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00504

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|-----------|--|-----------------------|
| X         | WO 9843446 A2 (TELEFONAKTIEBOLAGET LM ERICSSON),<br>1 October 1998 (01.10.98), page 3,<br>line 27 - page 4, line 22; page 6,<br>line 20 - page 7, line 6; page 8,<br>line 21 - line 26<br>-- | 1-8,10-19             |
| A         | US 5793762 A (JOHN HENRY HUBERT PENNERS ET AL),<br>11 August 1998 (11.08.98), column 2,<br>line 53 - column 4, line 51, abstract<br>--   | 1-19                  |
| A         | WO 9859468 A2 (NOKIA TELECOMMUNICATIONS OY),<br>30 December 1998 (30.12.98), page 6,<br>line 7 - line 22<br>--<br>-----  | 1-19                  |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

16 August 2000

Date of mailing of the international search report

17 -08- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Nabil Ayoub/MP

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/FI 00/00504

| Patent document<br>cited in search report |         |    | Publication<br>date | Patent family<br>member(s) |           | Publication<br>date |
|---|---------|----|---------------------|----------------------------|-----------|---------------------|
| WO  | 9843446 | A2 | 01/10/98            | AU                         | 6531598 A | 20/10/98            |
| US  | 5793762 | A  | 11/08/98            | US                         | 5457736 A | 10/10/95            |
| WO  | 9859468 | A2 | 30/12/98            | AU                         | 7920998 A | 04/01/99            |
|   |         |    |                     | EP                         | 0920761 A | 09/06/99            |
|   |         |    |                     | FI                         | 972725 A  | 25/12/98            |